


SCHEMATIC
VIEW FROM BASE END

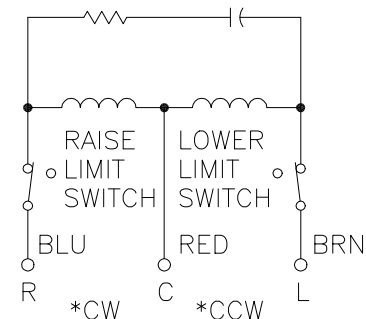

120V, 50/60 HZ.
 * ROTATION AS VIEWED FROM MOTOR END
 SPEED: 5 SECONDS

MOTOR CIRCUIT

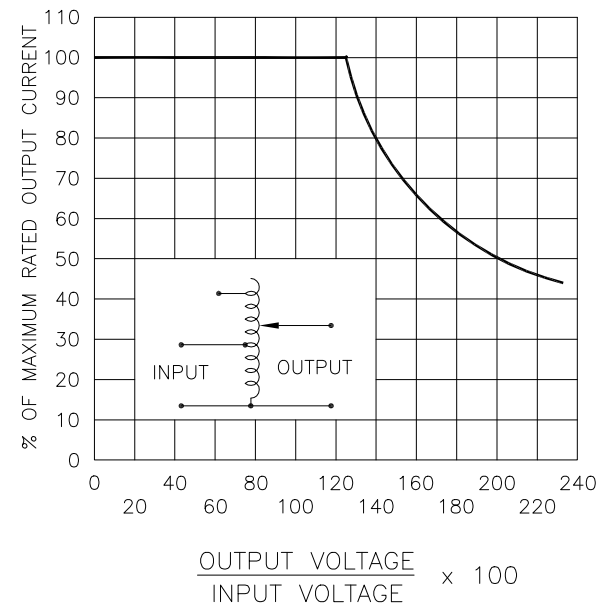


FIGURE A

MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.

SPECIFICATIONS									
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END		
SINGLE PHASE	240	50/60	0-240	35	8.4	CW	2-4	2-3	
			0-280	35	9.8	CCW	4-2	4-3	
	120	50/60	0-280	35-15# V.D.	4.2 †	CW	2-5	2-3	
						CCW	4-1	4-3	
						CW	2-6	2-3	
							CCW	4-7	4-3

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS		Holes .12		Angles 1°		Draft 1-1/2°		UNITS IN [mm]	
XX .005		XXX .005						TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 5M6020	
MATERIAL:		DATE		FIRST USED ON		DO NOT SCALE DWG.		CUSTOMER APPROVAL	
DRAWN BY		DATE		WEIGHT APPROX.		CODE IDENT. NO. 83008		DWG. NO.	
CHECKER		DATE		SCALE		SHEET 1 OF 1		D 032-7584	
ENGINEER		DATE							

