


1. MATERIAL: ALNICO 5, SINTERED OR CAST
2. MAGNETIZATION LEVEL: SEE BELOW
3. MAGNETIZATION DIRECTION: PARALLEL TO LENGTH
4. DIMENSIONS: AS SHOWN
5. SQUARNESS: 1"
6. PACKING: PREFERRED METHOD IS SHRINK WRAPPED ON CARDBOARD FLATS; 100,500, OR 1000 PER FLAT; POLES ATTRACTING. OTHER METHODS MAY BE ACCEPTABLE WITH APPROVAL.

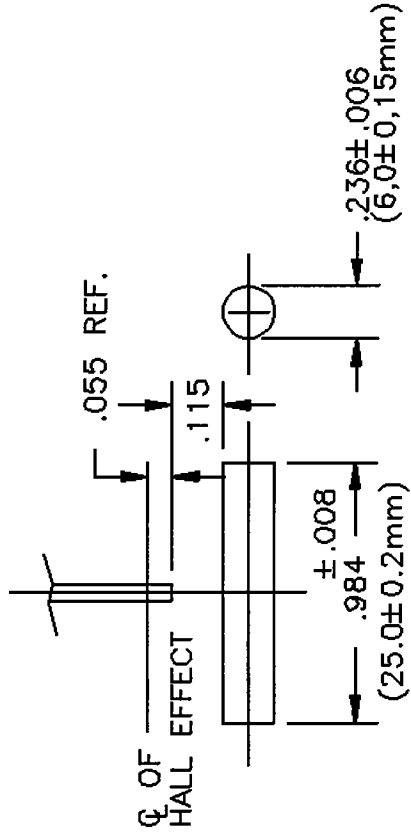

MAGNETIZATION LEVEL USING F.W. BELL METER 4048 AND TRANSVERSE PROBE #1706
 175 GAUSS MINIMUM MEASURED AT THE MAGNETS CENTER AT AN AIR GAP OF .115"
 PER ABOVE DRAWING. (TN-3933-C)

625 MAGNET

H A M L I N, Inc.

DCR No. 9387

| | | | | | | | | | | |
|------|-------------------------|---------|----|---------|------|---------|----------|------|---------|-------------|
| AC | ADD PACKAGING | A6860 | JC | 2/18/98 | JC | 2/18/98 | Dwn. GJ | DATE | 2/15/84 | 250-70-402 |
| REV. | DESCRIPTION OF REVISION | DCR No. | BY | DATE | APP. | DATE | App'd GJ | DATE | 2/20/84 | Page 1 of 1 |