

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC TO 26.5 GHz
- 1.2 MAXIMUM INPUT POWER:  
2 WATTS AT +25°C  
1 WATT AT +125°C
- 1.3 MAXIMUM VSWR:  
DC to 4 GHz: 1.05:1  
4 to 12 GHz: 1.10:1  
12 to 18 GHz: 1.14:1  
18 to 26.5 GHz: 1.30:1
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 TEMPERATURE RANGE: -65°C to +125°C

2.0 MARKING:

- 2.1 MARK UNIT AS SHOWN:  
REF.: INK-02639-27-71

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

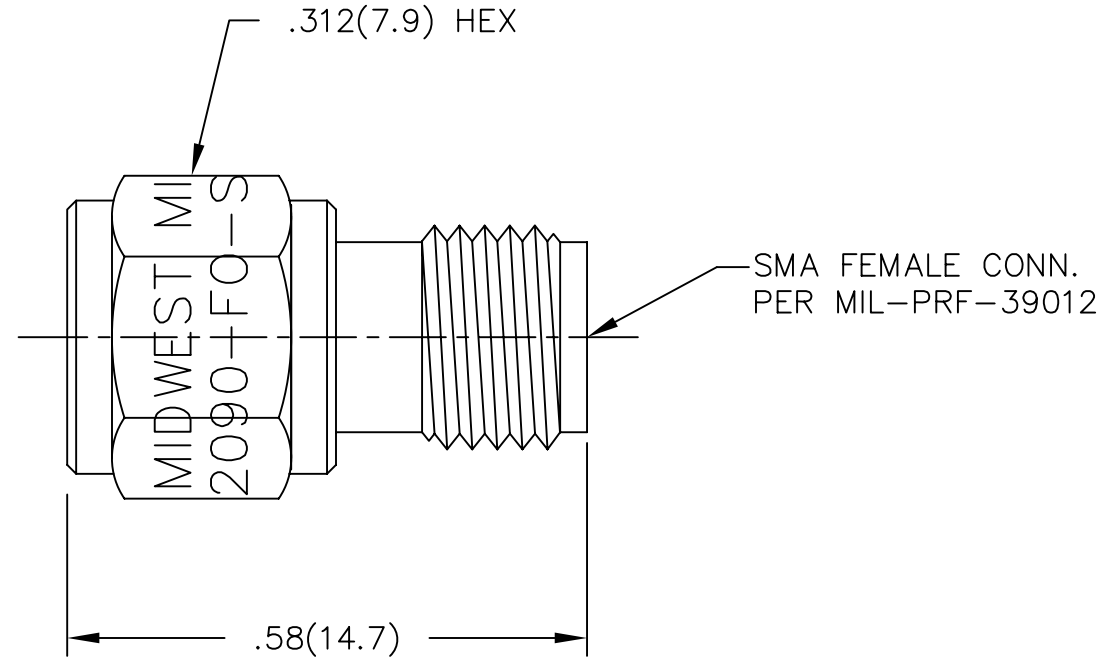

DWG. NO. WAS: 02360-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/11/97
-1	ADDED TITLEBLOCK	10/28/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE 2 WATT TERMINATION	
		DRAWING NUMBER TRM-2089-FO-SMA-02	
	DRAWN/DATE J.VERNON 12/20/89	ENG./DATE G.KOZAK 2/11/97	SCALE: 5=1