NOTES: UNLESS OTHERWISE SPECIFIED

LTR

1. P/N: XJLCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: NICKEL SILVER ALLOY CA 770.
SPRING: STAINLESS STEEL TYPE 302.


 $\dot{\mathcal{S}}$ 

P/N: 9274COLOR INSULATOR: MOLDED PVC. AVAILABLE ALLIGATOR: STEEL. NICKEL PLATED. IN TEN COLORS.

З. P/N: W-600/COLOR 18AWG 65X36 TINNED COPPER 0.144 [3.66] O.D. PVC INSULATION AVAILABLE IN TEN COLORS.

4. PERFORMANCE MAXIMUM CURRENT: 4.0 AMPS MAXIMUM VOLTAGE: 5000 W.V.D.C.

MAXIMUM TEMPERATURE: 221°F (105°C)

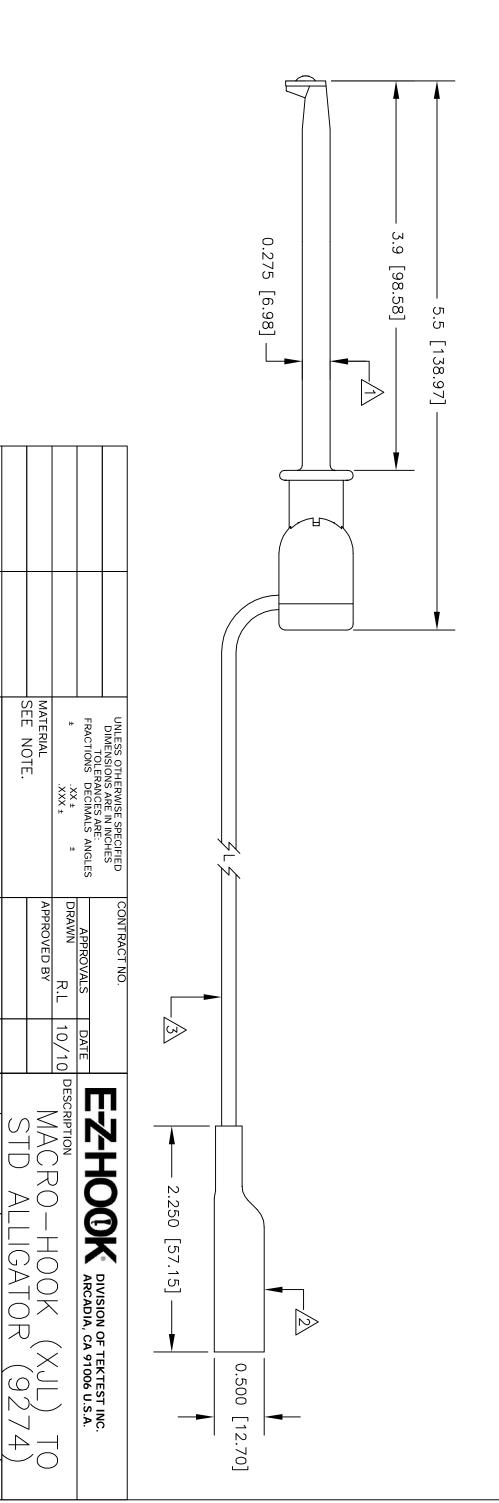

DO NOT SCALE DRAWING

**NEXT ASSY** 

USED ON

SEE NOTE. FINISH

CODE IDENT NO. DRAWING NO.

08505

619XJL

SHEET 1 OF

APPLICATION